

X-HALF CUT N-TYPE serie TOPCon

470/480_{Wp}
Power

TOPCon Cells

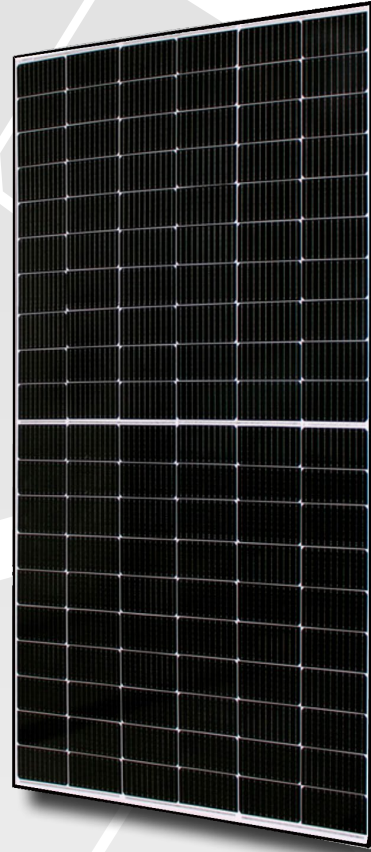
5400 PA
Mechanical Load

182x91mm
Cell Size

22.18%
efficiency


15 years
product warranty

25 years
linear warranty



X-HALF CUT N-Type serie TOPCON+ involves the introduction of a thin oxide layer between the metal contacts and the silicon wafer, which brings significant improvements in cell conversion efficiency and power generation performance.

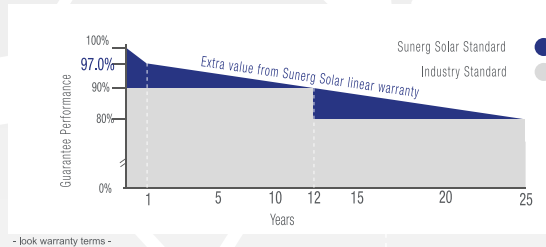LINEAR WARRANTY



- look warranty terms -

CORRESPOND TO

| UNI9177 | PV CYCLE | CE |

UNI EN ISO 9001:2008
UNI EN ISO 14001:2004
UNI EN BS OHSAS 18001:2007

| Quality management system
| Standards for environmental management system
| International standards for occupational health and safety

ELECTRICAL DATA (STC)

		XMHCTP470+H	XMHCTP475+H	XMHCTP480+H
Open circuit Voltage	(Voc)	42.42 V	42.63 V	42.86 V
Voltage a Pmax.	(Vmp)	34.81 V	34.97 V	35.13 V
Short-circuit current	(Isc)	14.23 A	14.31 A	14.39 A
Current at Pmax.	(Imp)	13.51 A	13.59 A	13.67 A
Nominal Peak Power (Pmax)		470 Wp	475 Wp	480 Wp
Module Efficiency		21.71%	21.94%	22.18%
Power output tolerance			-0/+5 W	
Maximum voltage			1500 V	
Maximum series fuse rating			25 A	
Limiting reverse current			20 A	
Operating Temperature			- 40°C to 85°C	

* STC (Standard test conditions)

Tolerance electric measurement and Power Output ±3%

Irradiance 1000 w/m², temperature 25°C, AM= 1.5

ELECTRICAL CHARACTERISTICS AT NOMINAL MODULE OPERATING TEMPERATURE (NMOT)

		355.9 W	359.7 W	363.4 W
Peak Power	(Pmax)			
Open Circuit Voltage	(Voc)	40.30 V	40.50 V	40.70 V
Short Circuit Current	(Isc)	11.50 A	11.56 A	11.63 A
MPP Voltage	(Vmp)	33.10 V	33.20 V	33.40 V
MPP Current	(Imp)	10.75 A	10.83 A	10.88 A

* NMOT (Nominal Module Operating Temperature)

Irradiance 800 w/m², temperature 20°C, wind speed 1 m/s

TEMPERATURE COEFFICIENT




Pmax Temperature Coefficient	-0.316%/ °C
Voc Temperature Coefficient	-0.249%/ °C
Isc Temperature Coefficient	0.045% / °C

MECHANICAL DATA

Maximum Load	5400 Pa
Dimensions (mm)	1909 x 1134 x 35
Weight (Kg)	22.3
Solar cells type	N type Mono
No. solar cells	120 (6x20)
Dim. solar cells	182x91mm +/-1mm

GENERAL INFORMATION

Front Glass	3,2 mm, Tempered solar glass
Frame	Anodized aluminum alloy, with twin-wall profile and drainage holes
Junction Box	IP68 Rated with 3 Bypass diodes
Output Cable	4.0mm², 1100mm length, MC4 compatible connectors

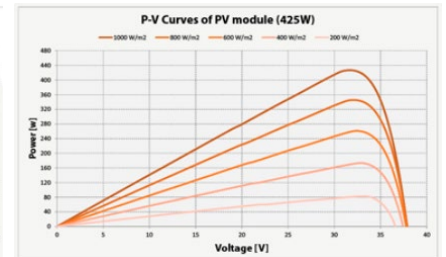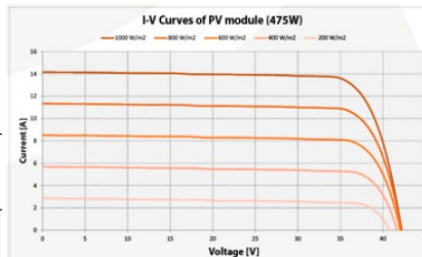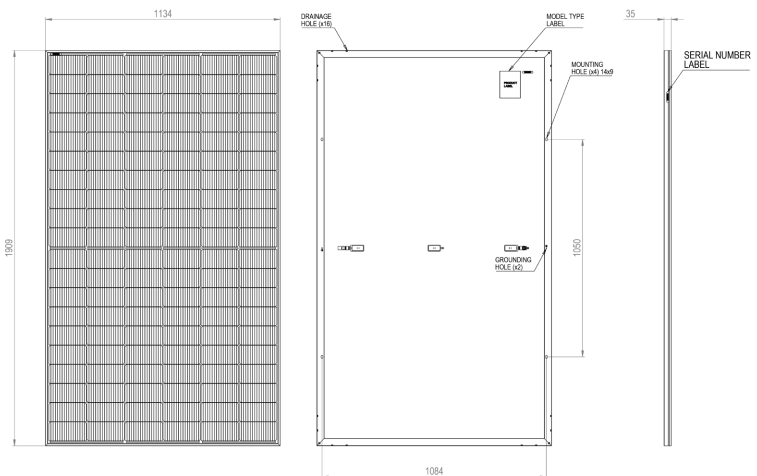
PACKING CONFIGURATION

Module per Pallet	31 pcs.
Modules per container 40'HQ	806 pcs.

Product properties not specified are at the sole discretion of Sunerg Solar Ltd. Sunerg Solar S.r.l. reserves the right to make changes to the technical data of the product without prior notice. The technical details of the form, although included with the utmost care, may contain errors or inaccuracies not attributable to Sunerg Solar S.r.l.